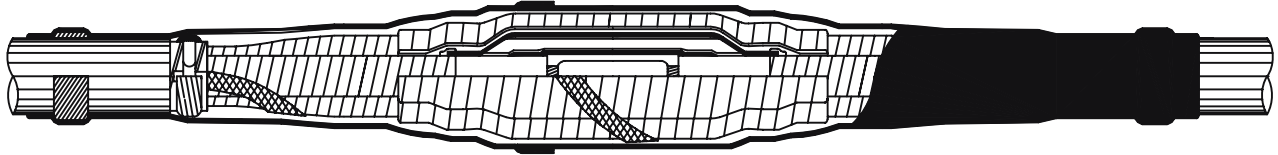


**ELASTIC STRAIGHT THROUGH JOINT - RTJMe-3C**

for three core polymeric cables - heatshrinkable outer protection (integrated electrode)

**elaspeed™****APPLICATION****Utilisation**

- jointing polymeric insulated cables of different specifications.
- conductor sizes equal or unequal, round or shaped.
- may be directly buried.
- jointing cables laid underground, in tunnels on horizontal racks, or aerial.

**Cables**

- three core polymeric insulation.
- copper or aluminium conductor.
- metallic screen of tape or wire type.
- semi-conducting screen either extruded or taped.
- insulation voltage up to 24 kV ( $U_m$ ).
- conductor sizes : 25 to 500 mm<sup>2</sup>.
- non-armoured or armoured.

**STANDARDS**

Generally meets the requirements of C 33 001 - DIN 57 278  
IEEE 404 - IEC 60502-4 - ENEL DJ 4853 - C 33 050-A1  
CENELEC HD 629-1.

**QUALITY ASSURANCE**

The Company has been assessed by third party and found in conformity with the requirements of the standard ISO 9001 - EN 29001.

**PACKING**

Supplied as a kit for one three core joint containing all the necessary components except the ferrules (supplied on request).

*Shipping weight and volume (approx) of kit.*

- 12 kV	6 kg / 0.06m <sup>3</sup>
- 17.5 kV	6 kg / 0.06m <sup>3</sup>
- 24 kV	6 kg / 0.06m <sup>3</sup>

**INSTALLATION FEATURES**


- no need for special tools.
- immediate energizing after completion of the joint.

**OTHER PRODUCTS**

- joint for 1/C polymeric cables EPJMe-1C, RTJMe-1C.
- transition joint between 3/C MIND paper insulated cables (radial or non radial) and 3 x 1/C polymeric cables EPJMt-1C/3C.
- joint for 1/C or 3/C MIND paper insulated cables.

### ELASTIC STRAIGHT THROUGH JOINT - RTJMe-3C

for three core polymeric cables - heatshrinkable outer protection (integrated electrode)

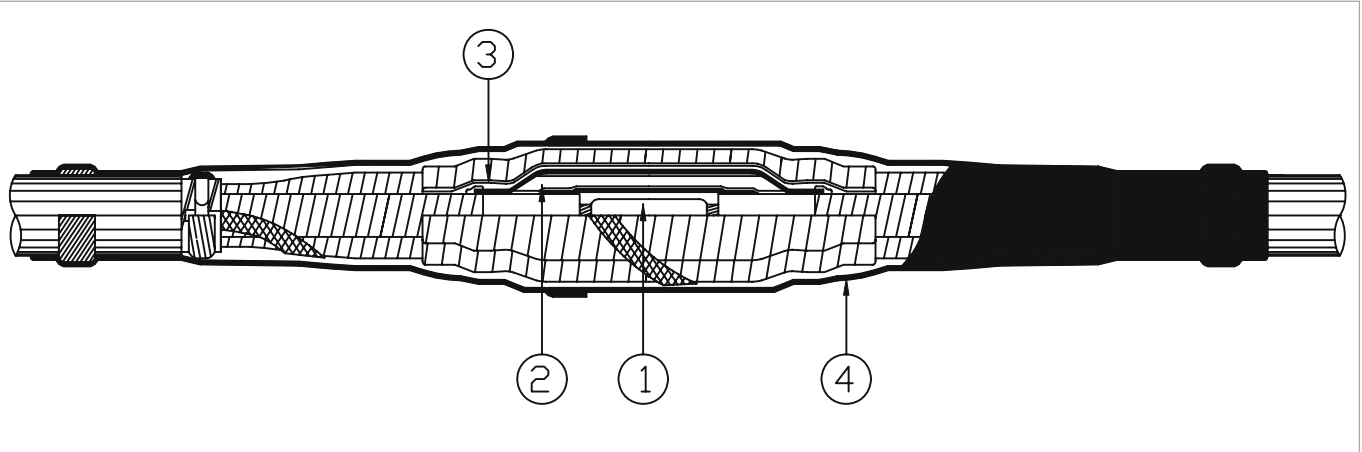

### DESCRIPTION

- ① **Conductor ferrule**  
Crimped, deep indented or bolted type.  
Please consult us.
- ② **Joint body**  
It maintains a permanent and uniform contact pressure on the cable insulation.  
Extruded EPR rubber, electrically tested in factory after extrusion. It includes :
  - semi-conducting layer used like shielding electrode,
  - stress relief layer,
  - insulation layer,
  - outer semi-conducting layer.
 The outer semi-conducting layer ensures relief of electrical stress and connection to cable screens.  
**Removable carrier**  
The joint body is pre-loaded on a single removable carrier made of two parts.
- ③ **Core screen**  
For tape screen : tubular copper mesh of adapted cross section (with additionnal copper braid, if necessary) connected on cable screens.  
For wire screen : copper mesh tape and direct connection of cable screen wires.
- ④ **Outer protection**  
Heat shrinkable tubes. Ensures the mechanical protection and the watertightness of the joint.

### SELECTION GUIDE

1. Select in the table below, the kit model corresponding to the insulation voltage  $U_m$  (in kV : 12 - 17.5 - 24) and the diameter over insulation.

VOLTAGE $U_m$	min. OD insulation mm	max. conductor size in sqmm (for guidance only)	KIT REFERENCE
12 kV	17.2	70 - 120	RTJMe-3C-12-D
	19.0	95 - 150	RTJMe-3C-12-E
	23.1	185 - 300	RTJMe-3C-12-F
	24.4	240 - 400	RTJMe-3C-12-H
	27.8	300 - 500	RTJMe-3C-12-IP
17.5 kV	17.2	50 - 70	RTJMe-3C-17-D
	19.0	70 - 120	RTJMe-3C-17-E
	23.1	150 - 240	RTJMe-3C-17-F
	24.4	185 - 300	RTJMe-3C-17-H
	27.8	240 - 500	RTJMe-3C-17-IP
24 kV	17.2	25 - 50	RTJMe-3C-24-D
	19.0	50 - 95	RTJMe-3C-24-E
	23.1	95 - 240	RTJMe-3C-24-F
	24.4	120 - 300	RTJMe-3C-24-H
	27.8	185 - 400	RTJMe-3C-24-IP

2. Specify insulation voltage  $U_m$  in kV : 12 - 17 - 24.
3. Select the screen continuity device according to the type of metallic screen of cable :  
T2 for tape screen - T3 for wire screen.

### EXAMPLE OF ORDER

20 kV three core polymeric cable, with tape screen,  
3 x 150 sqmm, OD over insulation 26 mm :  
**RTJMe-3C-24-F-T2**

IMPORTANT : before using this product, you must check if it is suitable for your intended application. You assume all risks and liability associated with such use. If any doubt, please consult us.